


DATA SHEET

6" Prime | 147473

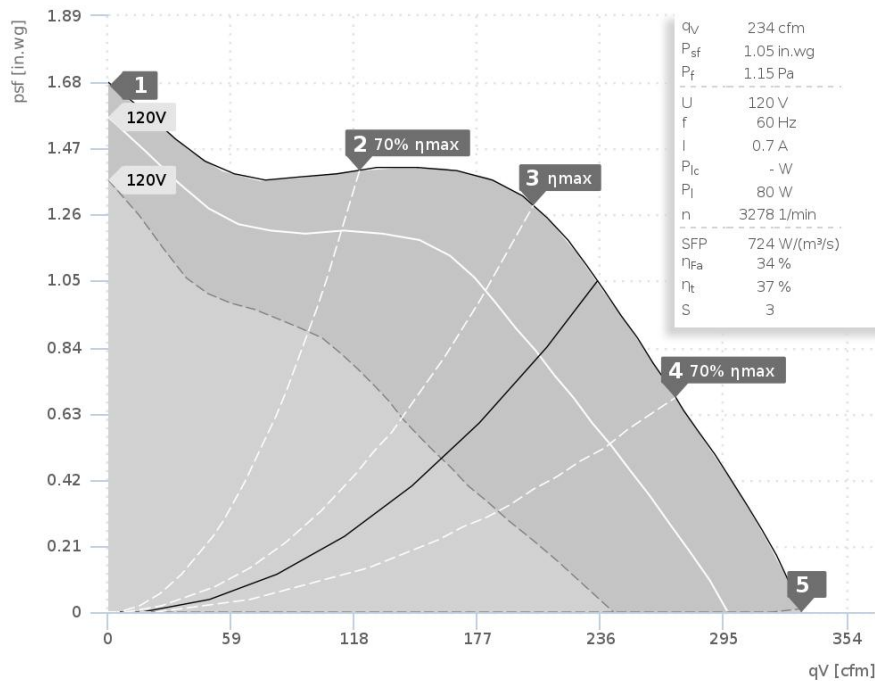

Operating Point		1	2	3	4	5
Current I	A	0,6	0,7	0,7	0,7	0,7
Power consumption P_1	W	64	72	80	80	76
RPM n	1/min	3414	3339	3277	3281	3334
SPL inlet L_{WA5}	dB(A)	73	68	66	69	73
SPL outlet L_{WA6}	dB(A)	77	71	68	71	75
SPL casing break out L_{WA2}	dB(A)	61	58	57	60	65

Sound power (L_W) dB(A)		Medium Frequency Band									
		Σ	63	125	250	500	1k	2k	4k	8k	
Inlet	L_{WA5}	67	37	34	42	57	62	63	60	50	
Outlet	L_{WA6}	69	34	35	44	58	65	64	62	52	
Casing	L_{WA2}	59	41	27	40	49	53	56	48	35	

6" Prime 147473	
Voltage U_N	120 V 1~
Current I_{max}	0,8 A
Ambient temperature t_A	70 °C
Medium temperatures t_M	70 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	2,4 kg